




MANUAL FOR ATTACHING PARASOL CANVAS

VIS INTERNATIONAL GmbH
Klosterwiesgasse 101b / EG / Ge1, A-8010 GRAZ

e-mail: info@vis.international
www.vis.international
online store: shop.vis-cro.com

1. REMOVAL OF PARASOL CANVAS

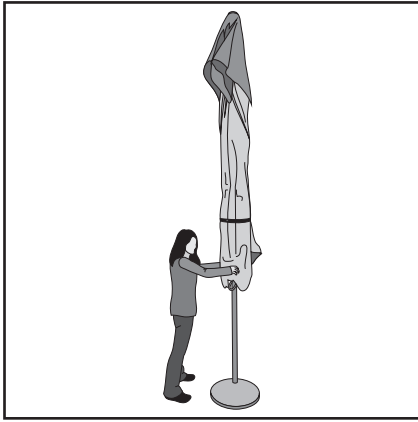


Step 1

Pay attention to people and objects in the vicinity!


Step 2

Carefully, without using force, pull the ribs/struts away from the parasol mast.

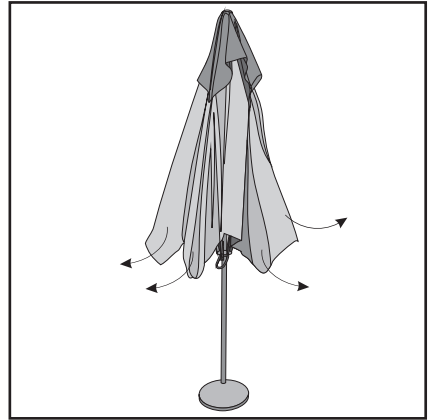


Step 3

Do not open the parasol completely, just so far that the ribs/struts are at an angle of 60° - 75° to the parasol mast.

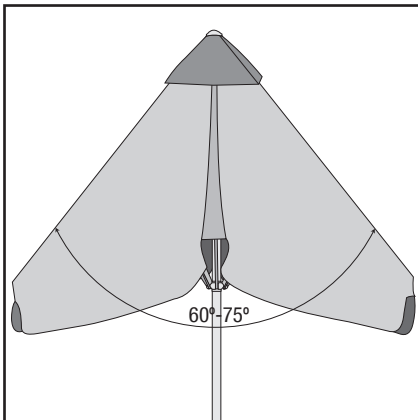



Step 4

Unscrew the screws on the ribs/strut ends (8x) counterclockwise and pull the ribs/struts out of the plastic caps.

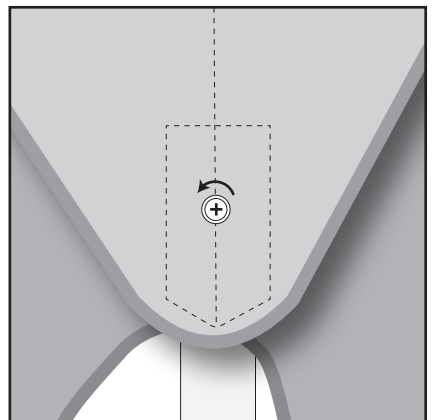


Step 5

Close the parasol and lay it on the ground with the top slightly raised.

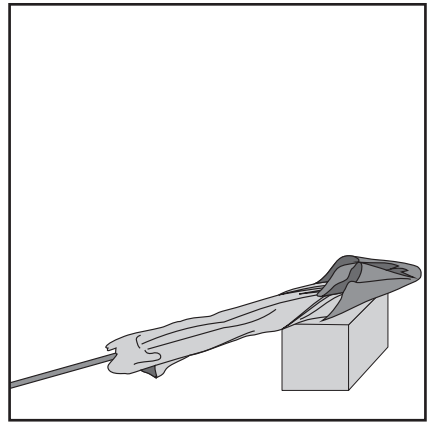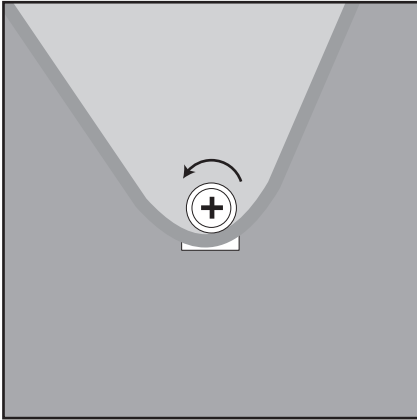


Step 6 *(Double Top model only)*

Unscrew the screws at the ribs/strut ends (4x) clockwise and loosen the fabric from the umbrella construction.

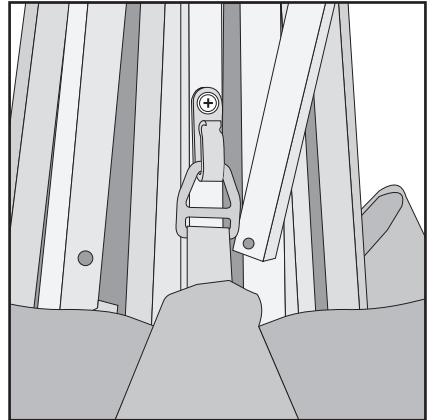

Step 7 *(Only for Double Top model)*

Detach the fabric of the frame, under which there are hooks (8x) with which these are connected to the canopy, and unbutton them. You can then remove the complete umbrella fabric from the frame by pulling the fabric over the top of the umbrella.

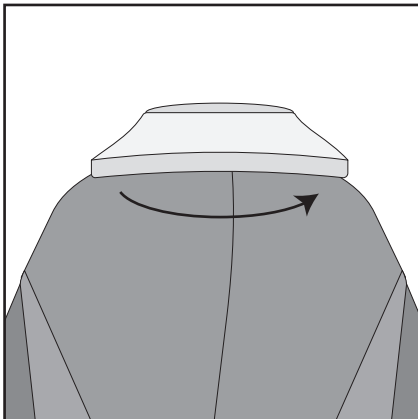



Step 8

Remove the plastic cap by unscrewing counter-clockwise and remove the cap from the canopy, pull the canopy cover over the top of the parasol.

2. ATTACHING OF PARASOL CANVAS

Step 1

Close the parasol and lay it on the ground so that the top of the parasol is slightly raised.

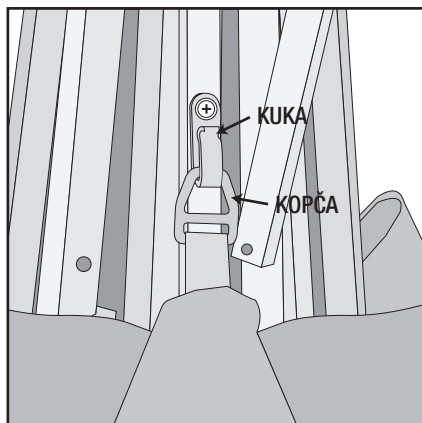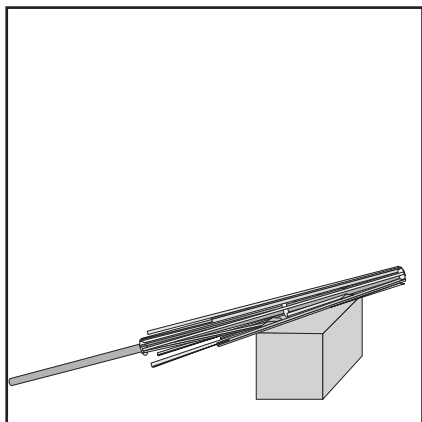



Step 2 *(Double Top model only)*

Thread the umbrella fabric over the top of the umbrella and attach it with clips (8x) to the fabric with the hooks on the umbrella frame. Begin the attachment by first attaching the clip in the center of the parasol to the hook over which no strut goes of the Double Top.

Step 3

Pass the screw on the parasol's plastic cap through the hole in the center of the canopy (for double top umbrellas, through a hole in the center canopy) and turn the screw clockwise.

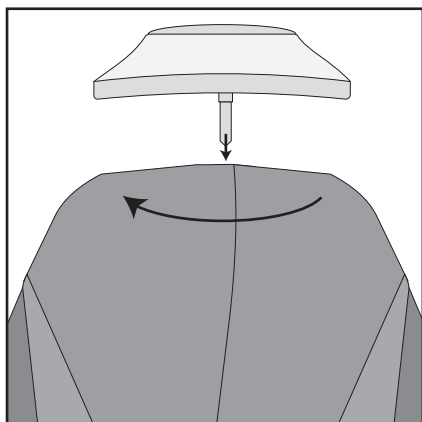


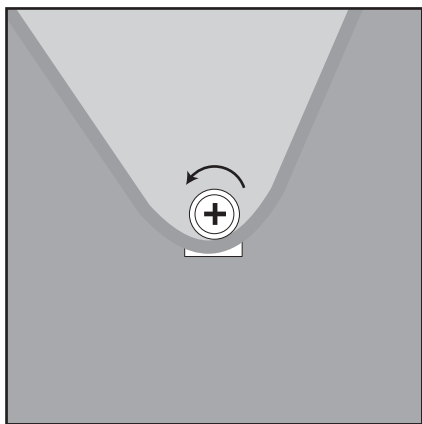


Step 4 *(Double Top model only)*

Attach the parasol canopy to the parasol frame with screws (4x) tightening clockwise
Designated spots on the ribs/strut ends of the double top.

Step 5

Place the parasol in a stand. Easily, without the use of force, you separate the ribs/struts in the opposite direction from the parasol mast.

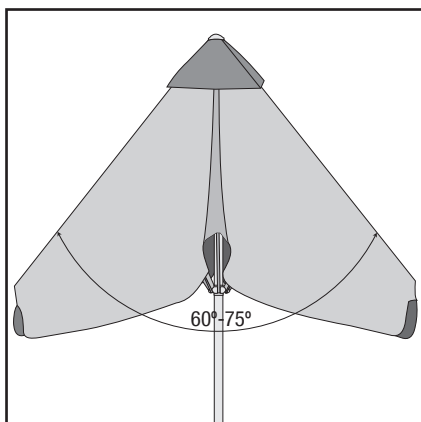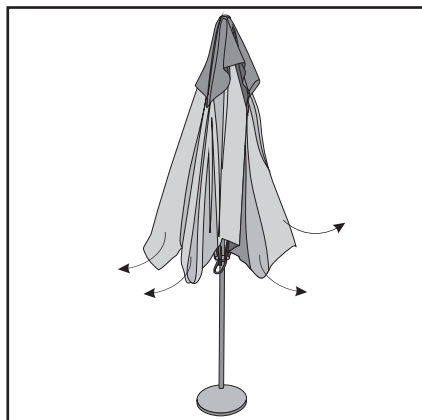

Step 6

Do not open the sunshade all the way, but only so far that the ribs/struts are at an angle of 60°-75°.

Step 7

Slide all (8x) plastic caps over the ribs/struts and attach with screws and tighten clockwise.

